Jatkuva kylmäpuristettu naioneristetty rengasliitin - Sininen johtopääte

Model No. JW-TM01



SPECIFICATIONS

Materiaali	Kupari
Lämpötila	75/105°C
Pintakäsittely	Nailon-PVC
Tinapinnoite	Kyllä
Pakkaus	2000 PCS/rulla
Väri	Sininen
Tyyppi	Jatkuva kylmäpuristus

Jatkuva kylmäpuristettu naioneristetty rengasliitin, sininen johtopääteliittimet, jatkuva kylmäpuristettu naioneristetyt rengasliittimet, siniset narupäät, jatkuva kylmäpuristuspääte, johdon pääteliittimet, eristetty rengasliittimet
, sininen nailon-PVC-eristetty rengasliitin
Erinomainen ja hyvä materiaalivalikoima tekevät tuotteesta korkean turvallisuussuorituskyvyn ja pitkän käyttöiän.
Soveltuva laitteiden liittämiseen sähkönjakeluyksiköissä.
Materiaali Kuparin
lämpötila 75/105
astetta Tuppi Nailon PVC-pintakäsittely

Tinapinnoite K.ty 2000 PCS/rulla



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal




Reliable quality of real materials
Exquisite and good selection of materials makes the product high safety performance and long service life
Copper tinned terminal block
High-quality red copper conductive must be strong
Surface tin plating process to resist oxidation
PVC insulation
Flame retardant material
Two materials optional
Nylon insulation
Flame retardant material

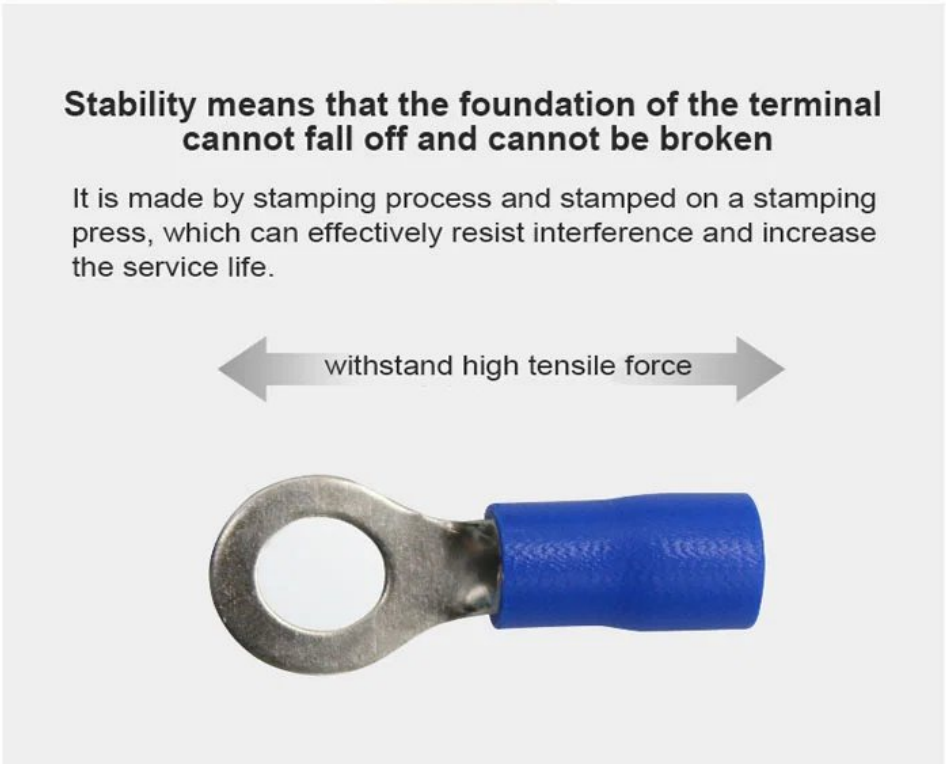
Stability means that the foundation of the terminal cannot fall off and cannot be broken
It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.
withstand high tensile force

With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity


Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Sample renderings display

Applicable cord

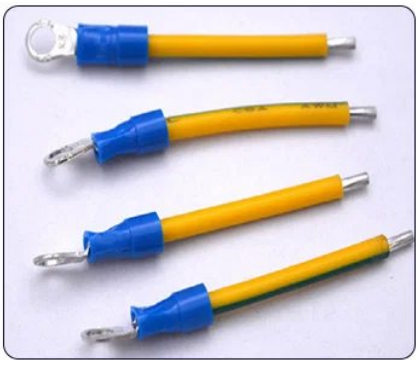

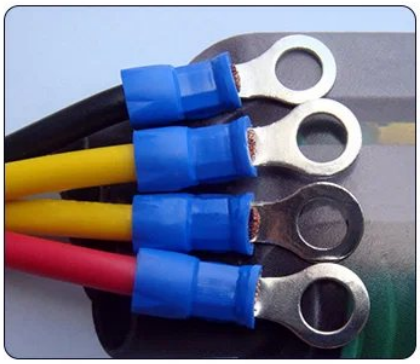
Product parameters

Material: copper
Temperature: 75℃/105℃
Sheath: Nylon/PVC
Surface Treatment: Tin Plating





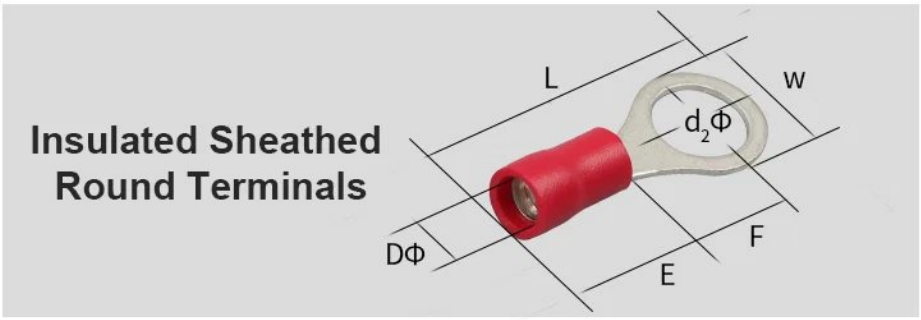

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN1.25-3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	18.5	5.0	10.0	4.0
RVN1.25-3.5 S				#6	3.7	5.7	185	5.0		
RVN1.25-3.5M				#6	3.7	6.6	20.0	6.3		
RVN1.25-35 L				#6	3.7	8.0	215	7.0		
RVN1.25-4 S				#8	4.3	6.6	19.5	63		
RVN1.25-4L				#8	4.3	8.0	21.5	7.0		
RVN1.25-5S				#10	5.3	8.0	21.5	7.0		
RVN1.25-5L				#10	5.3	9.8	23.5	8.5		
RVN1.25 6S				1/4	6.4	9.8	23.0	8.5		
RVN1.25-6L				1/4	6.4	11.6	27.5	11		
RVN1.25-8				5/16	8.4	11.6	27.5	11		
RVN1.25-10				3/8	10.5	13.6	31.6	14		

Blue (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN2-3	1.5-25 (16-14)	0.8	27A	#4	3.2	6.6	17 3	4.3	10.0	4.6
RVN2-35S				#6	3.7	6.6	17.3	4.3		
RVN2-3.5 M				#6	3.7	6.6	19.5	6.5		
RVN2-3.5 L				#6	3.7	8.5	21.8	7.7		
RVN2-4 S				#8	4.3	6.6	19 5	6.5		
RVN2-4L				#8	4.3	8.5	21 8	7.7		
RVN2-5 S				#10	5.3	8.5	21.8	7. 7		
RVN2-5L				#10	5.3	9.5	21.8	7.2		
RVN2-6				1/4	6.4	12.0	26.8	11.0		
RVN2-8				5/16	8.4	12.0	26.8	11.0		
RVN2-10				3/8	10.5	14.6	31.5	14		

Black (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN3.5 4	2.5~4.0 (14-12)	1.0	37A	#8	4.3	8.0	24.5	7.7	13.0	6.5
RVN35-5 S				#10	5.3	8.0	24.5	7.7		
RVN3.5-5 L				#10	5.3	12.0	27.9	8.6		
RVN3.5-6				1/4	6.4	12.0	27.9	8.6		
RVN35-8				5/16	8.4	15.0	34.0	14		
RVN3.5-10				3/8	10.5	15.0	34.0	14		

Yellow (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	W	L	F	E	DΦ
RVN5.5-3	4~6 (12-10)	1.0	48A	#4	3.2	7.2	22.7	5.9	14	7
RVN5.5-3.5				#6	3.7	7.2	22.7	5.9		
RVN5.5-4S				#8	4.3	7.2	22.7	5.9		
RVN5.5-4L				#8	4.3	9.5	26.3	8.3		
RVN5.5-5				#10	5.3	9.5	26.3	8.3		
RVN5.5-6				1/4	6.4	12.0	30	11		
RVN5.5-8				5/16	8.4	15.0	34.5	13.7		
RVN5.5-10				3/8	10.5	15.0	34.5	13.7		

Function Features

